


# REXON®



## POWER TOOLS CATALOG

# Company Profile

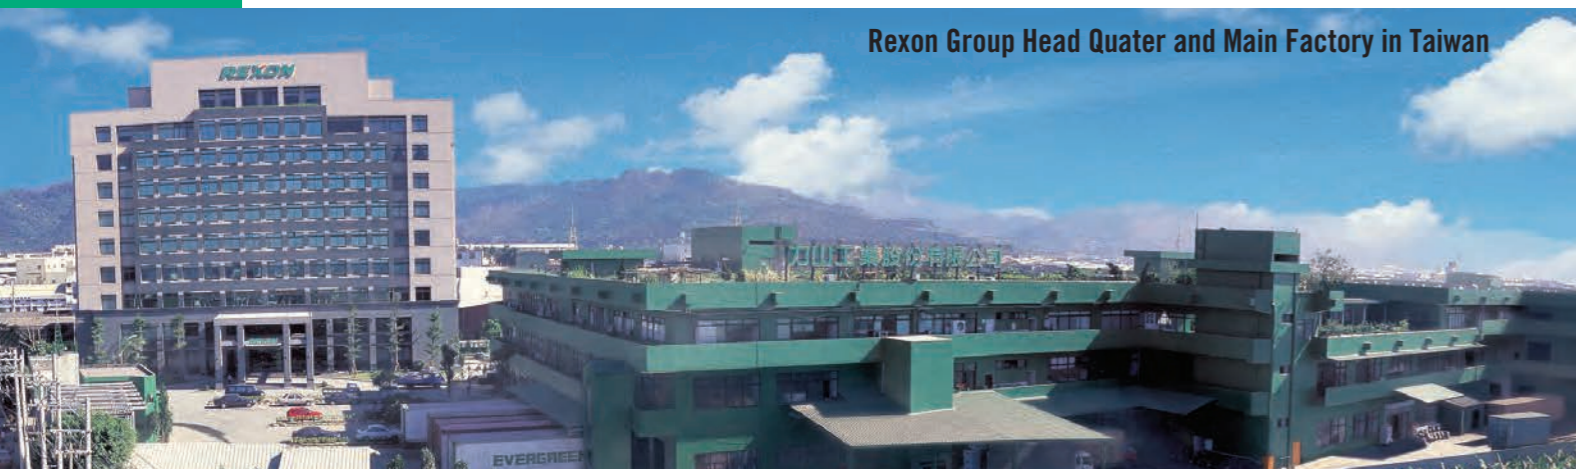

REXON Group Head Quater and Main Factory in Taiwan



REXON Manufacturing Base in Tongxiang, China


## Introduction

In 1972, REXON was founded in Taichung, Taiwan. From the very beginning, the company's relationships have been characterized by integrity, stability and growth. We are responsive to our customers around the world and provide products and service that far exceed our customer's expectations.

REXON Industrial Corporation, Ltd., a Taiwan-based corporation, has become one of the World's largest bench top/stationary machinery manufacturers, and holds a leading position in the design and manufacture of high end consumer and commercial grade fitness products with a market and customer base covering more than 70 countries. REXON is a publicly held company traded on the Taiwan Stock Exchange, and is an ISO9001 certified company; providing customers with quality and innovative products and services.


## Our belief and strategies

REXON stays committed to our core business and the philosophy of the founders which is Integrity, Stability and Growth. We strive to become the company where stockholders are confident to invest, which manufactures products delivering ease of use, superior quality and customer satisfaction, in an environment which promotes employee loyalty and personal development and employs best practice standards in areas of environmental controls and resource sustainability.

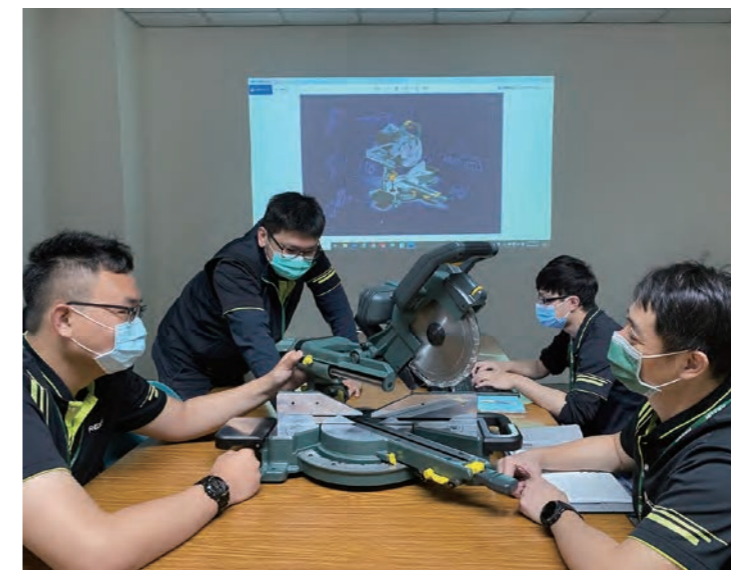

## Research & Development

- Nearly 100 engineers devote to the product research and development.
- Product lifecycle management system implementation through major engineering design software: Pro-E, solid works, catia etc.
- Rapid prototyping to verify functions and ergonomic designs.
- In-house electronic parts design & manufacturing.

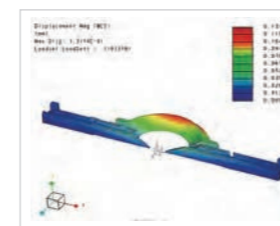

Finite Element Analysis



Rapid Prototyping



Electronic Parts Design & Manufacturing



## Motor Manufacturing In-House



- Over 35 years of experience from universal motors, Induction motors to DC motors.
- Brushless DC motor manufacturing.
  - Three phase output
  - Speed adjustment
  - Current limit and trip
  - Open / closed loop modes
  - Settable Indication output
  - Good efficiency
  - Low EMC emissions
  - DIN-rail mountable



Brushless DC Motor



Test Machines



BLDC Production Line




Stamping machines

## Steel/Welding Fabrication

- 76 Stamping machines, 7 Bending machines, 5 Laser cutting machines.
- 76 Automatic steel welding robots; 6 Automatic aluminum welding robots.

## CNC Machining/ Plastic Fabrication

- 16 CNC for making parts and finish machining to assure dimension.
- 9 Plastic injection machines in house.
  - Max. Equipment: 550 T
  - Max. Part: 500 x 500 mm

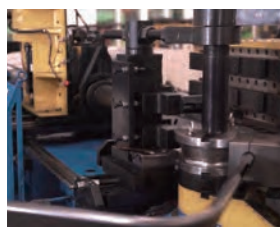

Bending Machines



Laser Cutting Machines



Welding Robots




CNC Machines



Plastic Injection Machines

## LAB

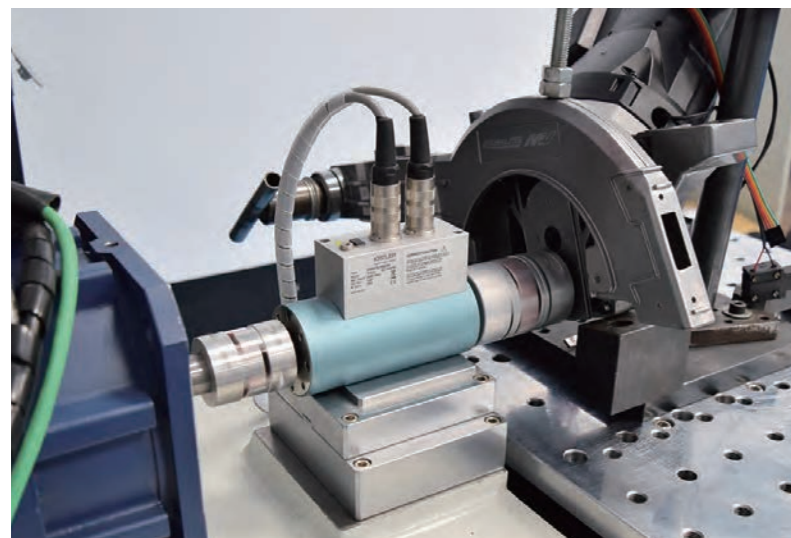

Brushless DC Motor test for Characteristics

## REXON LAB contains various critical parameter inspection equipment to test the safety and reliability of products.

- Brushless DC motor test for characteristics
- Ergonomic test-3D printer
- Electrical safety test-Microscope
- Electrical safety test-Glow wire tester
- Abnormal noise test-Industrial endoscope



Ergonomic test-3D printer



Electrical Safety Test-Microscope



Electrical Safety Test-Glow Wire Tester

# Contents

### Miter Saw

- P-05 P-06 CM2121R
- P-07 P-08 M2509R / M2503R2
- P-09 P-10 CM2122R

### Slide Miter Saw

- P-11 P-12 SM1851R / SM2121R / SM2158R  
SM2509R / SM2510R / SM2510R2  
SM2513R
- P-13 P-14 SM2518R / SM3057R / SM3057R2  
SM3058R

### Table Saw

- P-15 P-16 PT2506R
- P-17 P-18 JT2508R / BT2500R

### Drill Press

- P-19 P-20 DP15FRC
- P-21 P-22 30AT / DP10 / DP330A / DP13A  
DP380A / DP430F / 270F

### Tile Saw

- P-23 P-24 SC1802R
- P-25 P-26 SC2500R / SC2502R / TC1802R

### Scroll Saw

- P-27 P-28 VS4501R
- P-29 P-30 VS4500R / VS4005A

### Sander

- P-31 P-32 BD46A / BD460R / BD480R

### Bench Grinder

- P-33 P-34 BG1502R / BG1500R / BG2000R
- P-35 P-36 VG1500R / VG2000R

### Planer

- P-37 P-38 AP3300R

### Cut Off Saw

- P-39 P-40 CS3556R / CS3555R / CS3555R2

### Band Saw

- P-41 P-42 PB1200R / BS10KA / BS2300R

### Lawn & Garden

- P-43 P-44 GT3800R

HT6000R / LB3600R

### Icon / Description

- CE CE Regulations
- Double Insulated
- ☀ Laser Guide
- S Soft Start

# Miter Saw



Coming Soon

## CM2121R

8-1/2 in.(216 mm)  
Cordless Folding Compound Miter Saw



SPECIFICATIONS	36V	
Speed	4000rpm	4000min <sup>-1</sup>
Blade diameter x bore	8-1/2 x 5/8 or 1 in.	216 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L); 55°(R)	0°, 15°, 22.5°, 31.6°, 45°(R&L); 55°(R)
Cutting capacity at 90°/90°	2-1/4 x 4-3/4 in.	57 x 120 mm
Cutting capacity at 45°/90°	2-1/4 x 3-1/2 in.	57 x 88 mm
Cutting capacity at 90°/45°	1-1/2 x 4-3/4 in.	38 x 120 mm
Cutting capacity at 45°/45°	1-1/2 x 3-1/2 in.	38 x 88 mm
Package size (L x W x H)	23-7/16 x 21-3/32 x 10-7/16 in.	595 x 535 x 265 mm
Net / Gross Wt.	22 / 26.5 lbs.	10 / 12 kgs
20' Container loading	288 units	288 units
40' Container loading	608 units	608 units

**Optional**  
Blade, laser, extensions

Brushless DC motor,  
battery plug-in easily




Support base provides for  
long workpiece



Space saving folding design  
minimizes space for storage  
of saw



Aluminum table design  
for light weight to transport

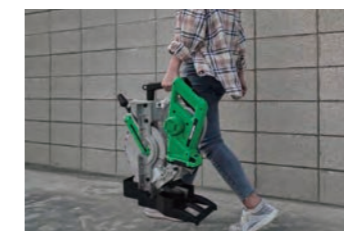

# Miter Saw

## M2509R

### 10 in.(254 mm) Folding Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor	13A	1800W
Speed	4500rpm	4500min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	2-5/8 x 5-11/16 in.	66.7 x 144.5 mm
Cutting capacity at 45°/90°	2-5/8 x 3-1/2 in.	66.7 x 88.9 mm
Cutting capacity at 90°/45°	1-9/16 x 5-11/16 in.	39.7 x 144.5 mm
Cutting capacity at 45°/45°	1-9/16 x 3-1/2 in.	39.7 x 88.9 mm
Package size (L x W x H)	23-5/32 x 22-9/16 x 9-3/4 in.	588 x 573 x 248 mm
Net / Gross Wt.	30.4 / 36.2 lbs.	13.8 / 16.4 kgs
20' Container loading	348 units	348 units
40' Container loading	715 units	715 units

**Optional**  
Blade, laser, extensions



Easy folding design for transporting. No tools required to fold

## M2503R2

### 10 in.(254 mm) Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor	15A	2000W
Speed	4500rpm	4500min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	2-5/8 x 5-11/16 in.	66.7 x 144.5 mm
Cutting capacity at 45°/90°	2-5/8 x 3-1/2 in.	66.7 x 88.9 mm
Cutting capacity at 90°/45°	1-9/16 x 5-11/16 in.	39.7 x 144.5 mm
Cutting capacity at 45°/45°	1-9/16 x 3-1/2 in.	39.7 x 88.9 mm
Package size (L x W x H)	23-7/16 x 16-7/16 x 16-5/32 in.	595 x 417 x 410 mm
Net / Gross Wt.	29.5 / 34 lbs.	13.4 / 15.4 kgs
20' Container loading	260 units	260 units
40' Container loading	530 units	530 units

**Optional**  
Blade, extensions





## SM1851R

### 7-1/4 in.(185 mm) Slide Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor	9A	1300W
Speed	5000rpm	5000min <sup>-1</sup>
Blade diameter x bore	7-1/4 x 5/8 or 1 in.	185 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	2 x 8 in.	50.8 x 203.2 mm
Cutting capacity at 45°/90°	2 x 6 in.	50.8 x 152.4 mm
Cutting capacity at 90°/45°	1-1/2 x 8 in.	38.1 x 203.2 mm
Cutting capacity at 45°/45°	1-1/2 x 6 in.	38.1 x 152.4 mm
Package size (L x W x H)	23-13/16 x 16-11/32 x 15-5/32 in.	605 x 415 x 385 mm
Net / Gross Wt.	25.8 / 30.6 lbs.	11.7 / 13.9 kgs
20' Container loading	294 units	294 units
40' Container loading	636 units	636 units

#### Optional

Blade, laser, extensions

## SM2121R

### 8-1/2 in.(216 mm) Folding Slide Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor	10A	1100W
Speed	5000rpm	5000min <sup>-1</sup>
Blade diameter x bore	8-1/2 x 5/8 or 1 in.	216 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L), 57°(L)	0°, 15°, 22.5°, 31.6°, 45°(R&L), 57°(L)
Cutting capacity at 90°/90°	2-7/16 x 12-9/32 in.	62 x 312 mm
Cutting capacity at 45°/90°	2-7/16 x 8-11/32 in.	62 x 212 mm
Cutting capacity at 90°/45°	1-3/16 x 12-9/32 in.	30 x 312 mm
Cutting capacity at 45°/45°	1-3/16 x 8-11/32 in.	30 x 212 mm
Package size (L x W x H)	27 x 17-23/32 x 16-9/16 in.	685 x 450 x 420 mm
Net / Gross Wt.	30.4 / 35.3 lbs.	13.8 / 16 kgs
20' Container loading	205 units	205 units
40' Container loading	425 units	425 units

#### Optional

Blade, laser

## SM2158R

### 8-1/2 in.(216 mm) Slide Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor	9.5A	1400W
Speed	5000rpm	5000min <sup>-1</sup>
Blade diameter x bore	8-1/2 x 5/8 or 1 in.	216 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	2 x 12 in.	50.8 x 304.8 mm
Cutting capacity at 45°/90°	2 x 8-1/4 in.	50.8 x 209.6 mm
Cutting capacity at 90°/45°	1 x 12 in.	25.4 x 304.8 mm
Cutting capacity at 45°/45°	1 x 8-1/4 in.	25.4 x 209.6 mm
Package size (L x W x H)	25-3/8 x 17-1/8 x 16-9/16 in.	645 x 435 x 420 mm
Net / Gross Wt.	31.3 / 36.2 lbs.	14.2 / 16.4 kgs
20' Container loading	225 units	225 units
40' Container loading	450 units	450 units

#### Optional

Blade, laser, extensions

## SM2509R

### 10 in.(254 mm) Slide Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor	15A	1800W
Speed	4800rpm	4800min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	2-1/2 x 12-1/2 in.	63.5 x 317.5 mm
Cutting capacity at 45°/90°	2-1/2 x 8-3/4 in.	63.5 x 222.3 mm
Cutting capacity at 90°/45°	1-5/8 x 12-1/2 in.	41.3 x 317.5 mm
Cutting capacity at 45°/45°	1-5/8 x 8-3/4 in.	41.3 x 222.3 mm
Package size (L x W x H)	28-5/16 x 17-29/32 x 16-29/32 in.	720 x 455 x 430 mm
Net / Gross Wt.	42.8 / 50.5 lbs.	19.4 / 22.9 kgs
20' Container loading	200 units	200 units
40' Container loading	400 units	400 units

#### Optional

Blade, laser, extensions

## SM2510R SM2510R2




### 10 in.(254 mm) Slide Compound Miter Saw

SPECIFICATIONS	120V	220V
Motor : SM2510R	15A	1800W
Motor : SM2510R2	15A	1500W
Speed : SM2510R	4000rpm	4000min <sup>-1</sup>
Speed : SM2510R2	3200rpm	3200min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	2-1/2 x 12-1/2 in.	63.5 x 317.5 mm
Cutting capacity at 45°/90°	2-1/2 x 8-3/4 in.	63.5 x 222.3 mm
Cutting capacity at 90°/45°(L)	1-5/8 x 12-1/2 in.	41.3 x 317.5 mm
Cutting capacity at 90°/45°(R)	1 x 12-1/2 in.	25.4 x 317.5 mm
Cutting capacity at 45°/45°	1-5/8 x 8-3/4 in.	41.3 x 222.3 mm
Package size (L x W x H)	28-5/16 x 20-3/32 x 18-3/32 in.	720 x 510 x 460 mm
Net / Gross Wt.: SM2510R	44.5 / 51.1 lbs.	20.2 / 23.2 kgs
Net / Gross Wt.: SM2510R2	45.4 / 53.4 lbs.	20.6 / 24.2 kgs
20' / 40' Container loading	173 / 353 units	173 / 353 units

#### Optional

Blade, laser, extensions

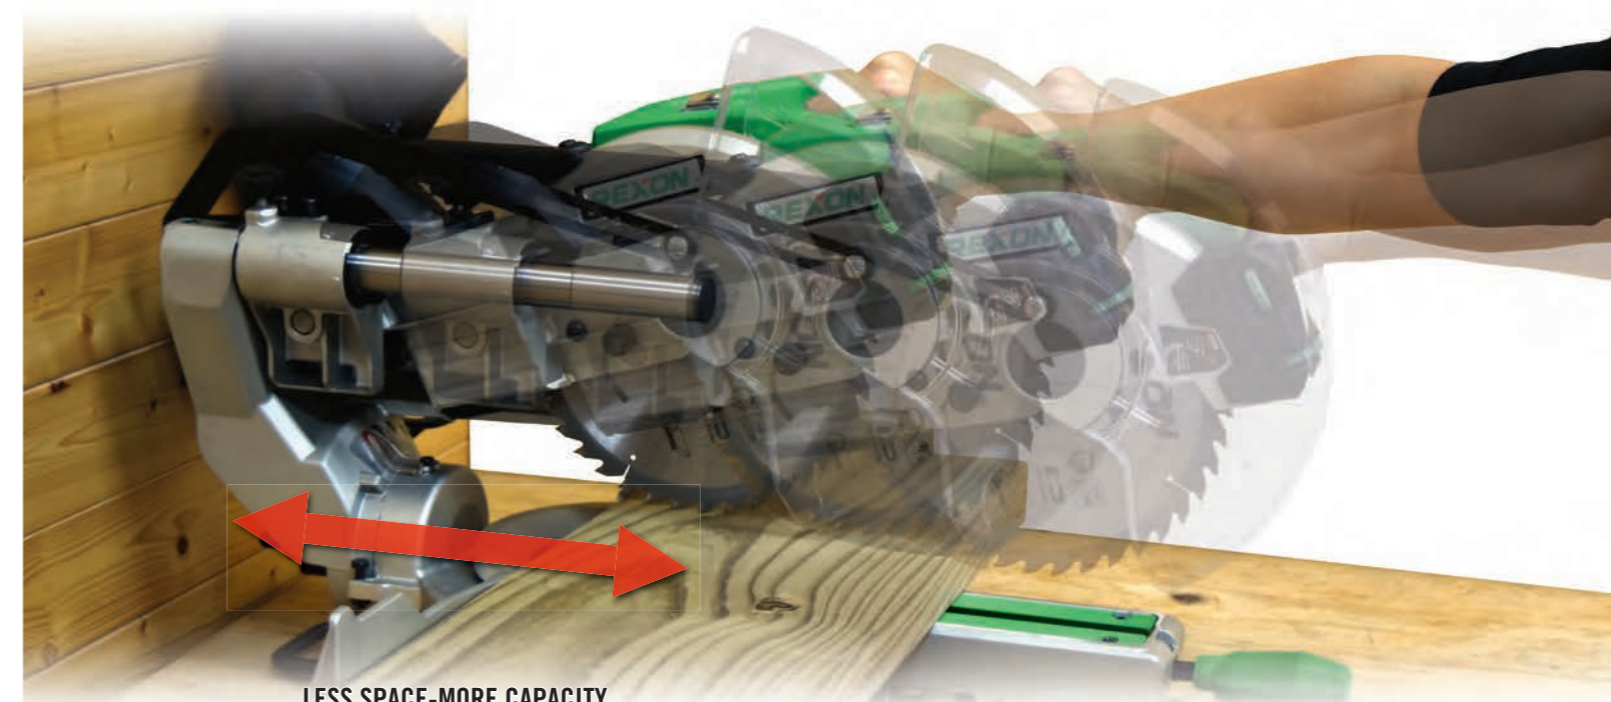

**LESS SPACE-MORE CAPACITY**  
Compared to our best selling slide miter

## SM2513R

### 10 in.(254 mm) Sliding Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor	15A	1650W
Speed	4800rpm	4800min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	3-9/16 x 12 in.	90.5 x 304.8 mm
Cutting capacity at 45°/90°	3-9/16 x 8 in.	90.5 x 203.2 mm
Cutting capacity at 90°/45°	1-5/8 x 12 in.	41.3 x 304.8 mm
Cutting capacity at 45°/45°	1-5/8 x 8 in.	41.3 x 203.2 mm
Package size (L x W x H)	31-9/32 x 19-15/32 x 17-1/2 in.	795 x 495 x 445 mm
Net / Gross Wt.	37 / 45 lbs.	16.8 / 20.4 kgs
20' Container loading	160 units	160 units
40' Container loading	335 units	335 units


#### Optional

Blade, laser, extensions

# Slide Miter Saw

## SM2518R

10 in.(254 mm) Variable Speed Dual Bevel Slide Compound Miter Saw

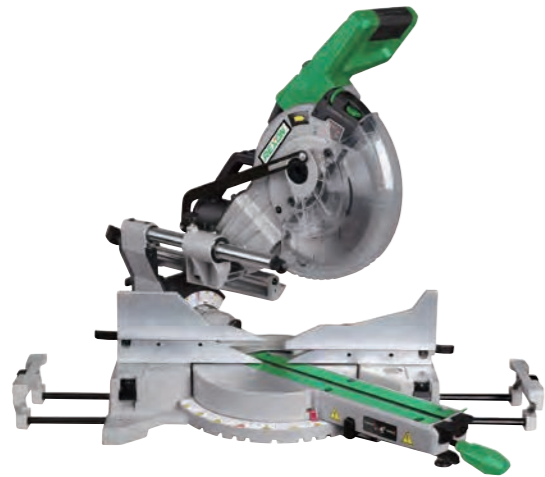

SPECIFICATIONS	120V	220V
Motor	15A	1600W
Speed	2000-4000rpm	2000-4000min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	2-1/2 x 12-1/2 in.	63.5 x 317.5 mm
Cutting capacity at 45°/90°	2-1/2 x 8-3/4 in.	63.5 x 222.3 mm
Cutting capacity at 90°/45°(L)	1-5/8 x 12-1/2 in.	41.3 x 317.5 mm
Cutting capacity at 90°/45°(R)	1 x 12-1/2 in.	25.4 x 317.5 mm
Cutting capacity at 45°/45°	1-5/8 x 8-3/4 in.	41.3 x 222.3 mm
Package size (L x W x H)	28-11/32 x 20-3/32 x 18-3/32 in.	720 x 510 x 460 mm
Net / Gross Wt.	47.4 / 54.9 lbs.	21.5 / 24.9 kgs
20' Container loading	173 units	173 units
40' Container loading	353 units	353 units

**Optional**

Blade, laser, extensions

## SM3057R SM3057R2



12 in.(305 mm) Dual Bevel Slide Compound Miter Saw



SPECIFICATIONS	120V	220V
Motor : SM3057R	15A	1800W
Motor : SM3057R2	15A	1600W
Speed : SM3057R	4000rpm	4000min <sup>-1</sup>
Speed : SM3057R2	3200rpm	3200min <sup>-1</sup>
Blade diameter x bore	12 x 5/8 or 1 in.	305 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	4 x 12-1/4 in.	101.6 x 311.2 mm
Cutting capacity at 45°/90°	4 x 8-3/4 in.	101.6 x 222.3 mm
Cutting capacity at 90°/45°(L)	2-1/2 x 12-1/4 in.	63.5 x 311.2 mm
Cutting capacity at 90°/45°(R)	1-3/4 x 12-1/4 in.	44.5 x 311.2 mm
Cutting capacity at 45°/45°	2-1/2 x 8-3/4 in.	63.5 x 222.3 mm
Package size (L x W x H)	27-15/16 x 20-9/32 x 20-3/32 in.	710 x 515 x 510 mm
Net / Gross Wt.: SM3057R	47.6 / 53.4 lbs.	21.6 / 24.2 kgs
Net / Gross Wt.: SM3057R2	47.6 / 54.9 lbs.	21.6 / 24.9 kgs
20' Container loading	140 units	140 units
40' Container loading	280 units	280 units

**Optional**

Blade, laser, extensions

## SM3058R

12 in.(305 mm) Variable Speed Dual Bevel Slide Compound Miter Saw





SPECIFICATIONS	120V	220V
Motor	15A	1600W
Speed	2000-4000rpm	2000-4000min <sup>-1</sup>
Blade diameter x bore	12 x 5/8 or 1 in.	305 x 30 or 25.4 mm
Miter detent stops	0°, 15°, 22.5°, 31.6°, 45°(R&L)	0°, 15°, 22.5°, 31.6°, 45°(R&L)
Cutting capacity at 90°/90°	4 x 12-1/4 in.	101.6 x 311.2 mm
Cutting capacity at 45°/90°	4 x 8-3/4 in.	101.6 x 222.3 mm
Cutting capacity at 90°/45°(L)	2-1/2 x 12-1/4 in.	63.5 x 311.2 mm
Cutting capacity at 90°/45°(R)	1-3/4 x 12-1/4 in.	44.5 x 311.2 mm
Cutting capacity at 45°/45°	2-1/2 x 8-3/4 in.	63.5 x 222.3 mm
Package size (L x W x H)	27-15/16 x 20-9/32 x 20-3/32 in.	710 x 515 x 510 mm
Net / Gross Wt.	50.7 / 56.4 lbs.	23 / 25.6 kgs
20' Container loading	140 units	140 units
40' Container loading	280 units	280 units

**Optional**

Blade, laser, extensions

SPACE SAVING DESIGN  
Innovative, sliding rail system

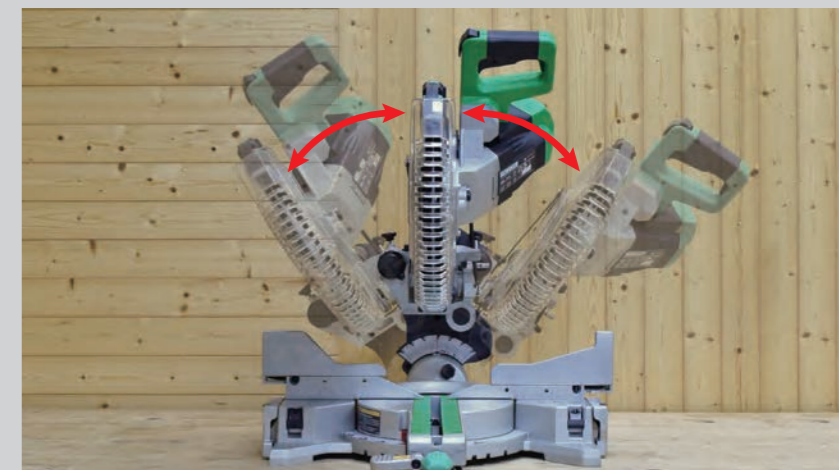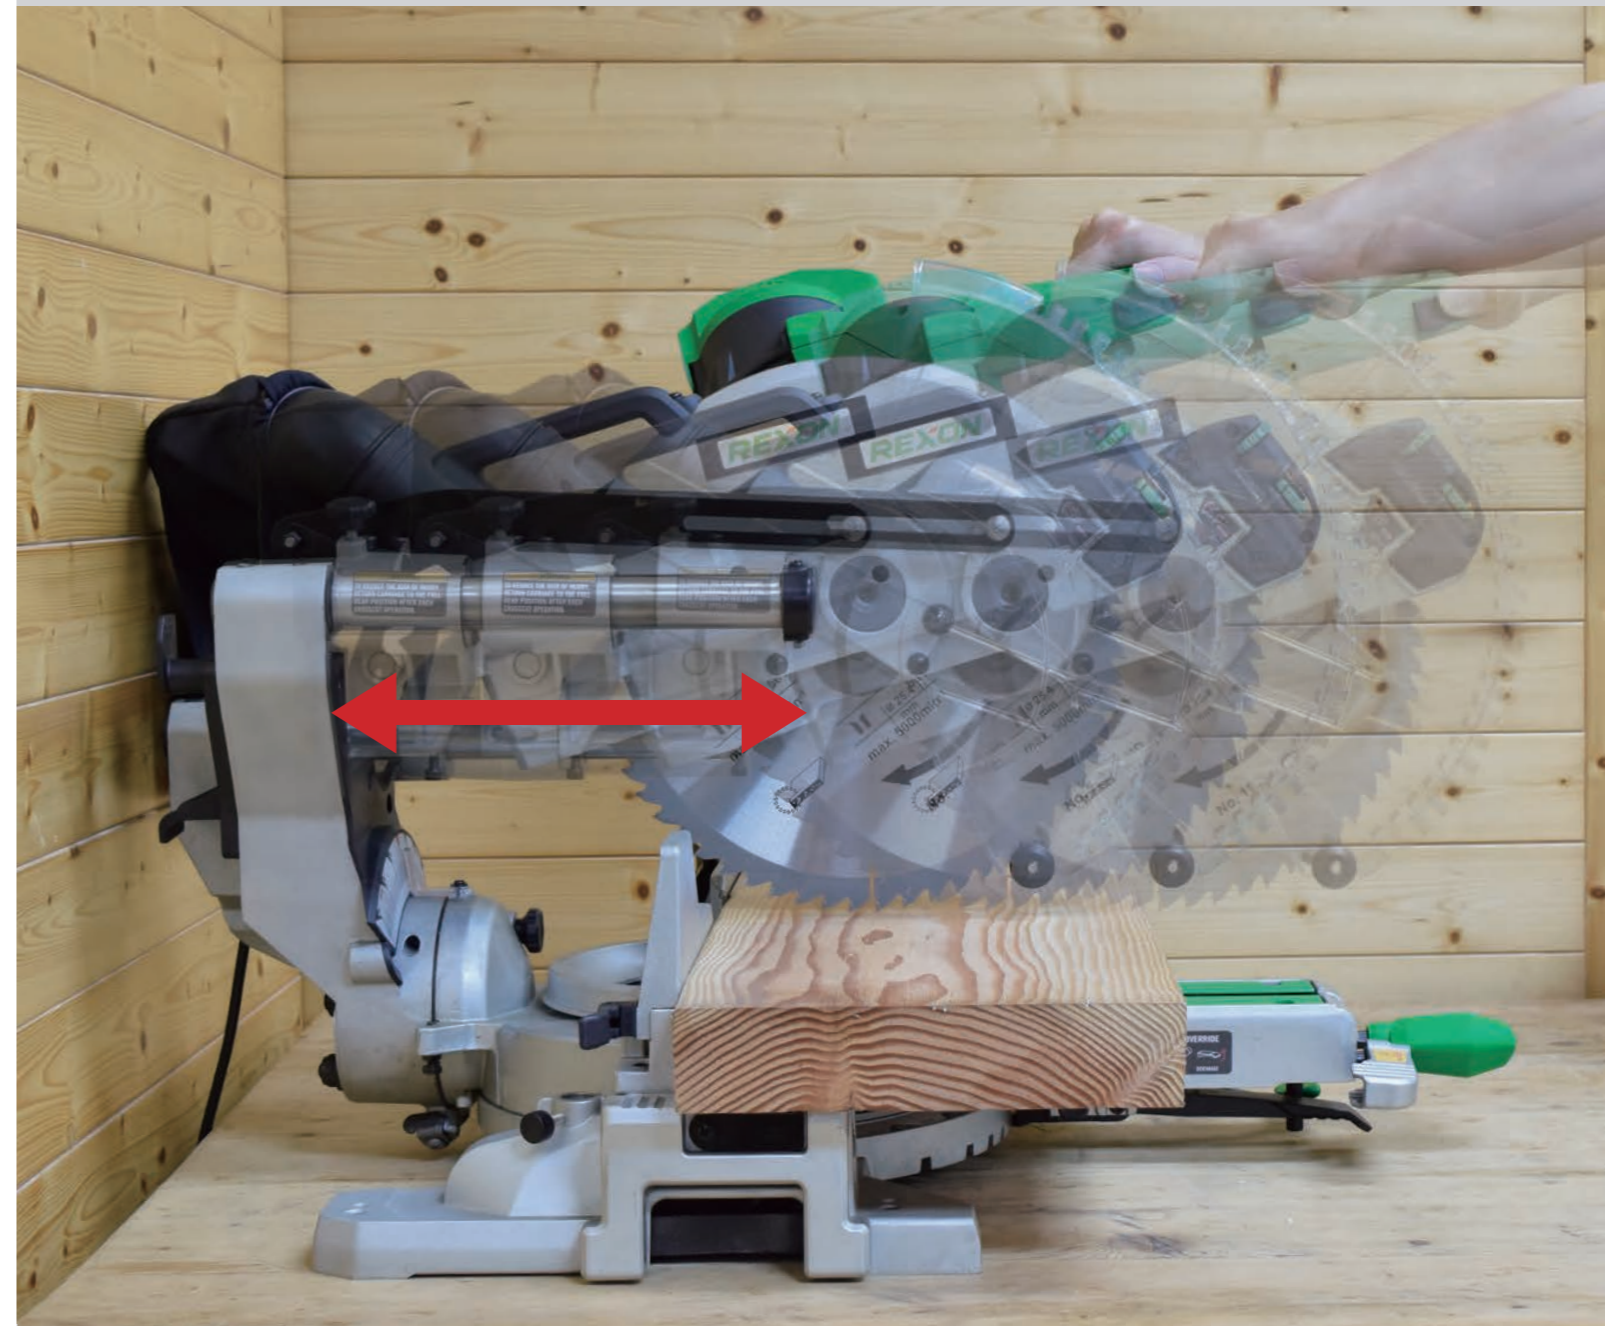



# Table Saw



Coming Soon

**PT2506R**


10 in.(254 mm)  
Stationary Table Saw




**Foldable rail and extension support table**  
quick set up of folding support provides stable and accurate cutting of large workpieces

SPECIFICATIONS	120V	220V
Motor	15A	1650W
Speed	3450rpm	2850min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Main table size	27-1/8 x 20-1/8 in.	689 x 511 mm
Ripping capacity	50 in. (L&R)	1270 mm (L&R)
Max. depth of cut at 90°	3-1/2 in.	86 mm
Max. depth of cut at 45°	2-1/4in.	57.2 mm
Package size (L x W x H)	51-15/16 x 29-23/32 x 30-23/32 mm	1320 x 755 x 780 mm
Net / Gross Wt.	308.6 / 330.7 Kgs	140 / 150 Kgs
20' Container loading	35 units	35 units
40' Container loading	78 units	78 units
<b>Optional</b>		
Blade		

**Large ripping capacity up to 50 in. (1270 mm)**  
enable user to cut the Market standard size wood 4 x 8 ft. (1,219 x 2,438 mm)

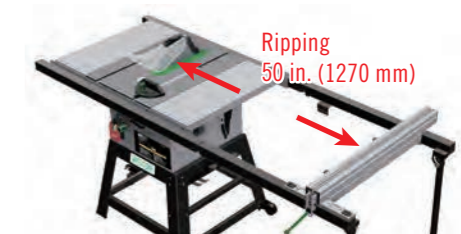

**Built-in supporting brackets design**  
for placement of optional MDF or wood board for additional support

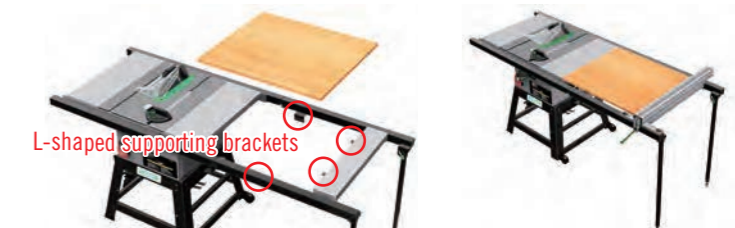

**Provide one step caster** for easy transportation



# Table Saw

## JT2508R

10 in.(254 mm) Jobsite Table Saw

Made in Taiwan

Coming Soon



SPECIFICATIONS	120V	220V
Motor	15A	1700W
Speed	5000rpm	5000min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Main table size	23-1/2 x 22-1/8 in.	596.9 x 561.9 mm
Ripping capacity	24 in.(L) & 30 in.(R)	609.6 mm(L) & 762 mm(R)
Max. depth of cut at 90°	3-1/2 in.	90 mm
Max. depth of cut at 45°	2-1/2 in.	64 mm
Package size (L x W x H)	38-3/8 x 25-19/32 x 22-7/16 in.	975 x 650 x 570 mm
Net / Gross Wt.	73.9 / 87.1 lbs.	33.5 / 39.5 kgs
20' Container loading	80 units	80 units
40' Container loading	168 units	168 units

Optional  
Blade

## BT2500R

10 in.(254 mm) Table Saw



SPECIFICATIONS	120V	220V
Motor	13A	1440W
Speed	5000rpm	5000min <sup>-1</sup>
Blade diameter x bore	10 x 5/8 or 1 in.	254 x 30 or 25.4 mm
Main table size	23 x 19-1/2 in.	584.2 x 495.3 mm
Ripping capacity	10-7/8 in.(L) & 9-1/2 in.(R)	276.2 mm(L) & 241.3 mm(R)
Max. depth of cut at 90°	3 in.	76 mm
Max. depth of cut at 45°	2-1/2 in.	64 mm
Package size (L x W x H)	27-5/32 x 22-1/32 x 12-5/8 in.	690 x 560 x 321 mm
Net / Gross Wt.	41.2 / 49.2 lbs.	18.7 / 22.3 kgs
20' Container loading	224 units	224 units
40' Container loading	475 units	475 units

Optional  
Blade, stand



For reference



For reference

# Drill Press



## DP15FRC

15 in.(380 mm) Bench Drill Press

## DP15FRC

15 in.(380 mm) Floor Drill Press




SPECIFICATIONS	120V	220V
Drilling capacity	5/8 in.	16 mm
Motor	1/2HP	370W
Speed	12 speeds	12 speeds
Spindle taper	MT2 x JT3	MT2 x JT3
Chuck capacity	5/8 in.	16 mm
Spindle travel	3-1/8 in.	79.8 mm
Distance from spindle to column	7-1/2 in.	190.5 mm
Column diameter	Ø 2-7/8 in.	Ø 73 mm
Table size	13-15/64 x 13-15/64 in.	336 x 336 mm
Base size	20-3/8 x 11 in.	518 x 279.4 mm
Overall height	45-21/32 in. (Bench) 63-1/4 in. (Floor)	1,160 mm (Bench) 1,606 mm (Floor)
Package size (L x W x H)	31-29/32 x 22-1/4 x 12 in. (Bench) 56-3/32 x 20-3/32 x 10-7/16 in. (Floor)	810 x 565 x 305 mm (Bench) 1425 x 510 x 265 mm (Floor)
Net / Gross Wt.	132.7 / 139.1 lbs. (Bench) 166.4 / 176.4 lbs. (Floor)	60.2 / 63.1 kgs (Bench) 75.5 / 80 kgs (Floor)
20' / 40' Container loading	196 / N/A units (Bench) 128 / 250 units (Floor)	196 / N/A units (Bench) 128 / 250 units (Floor)

### Optional

Vise, fence, work light

**Solid cast iron table**  
can tilt 45° left and right

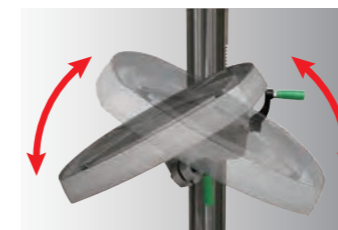

**Work light**  
Increases illumination of  
work table area



**Rack and pinion mechanism**  
enables the work table to rise  
and fall easily



**Tool holder provides  
convenient storage**  
for chuck key and hex wrench



## 30AT

### 8 in.(200 mm) Bench Drill Press



SPECIFICATIONS	100V	220V
Drilling capacity	1/2 in.	13 mm
Motor	1/4HP	190W
Speed	5 speeds	5 speeds
Spindle taper	JT2 1/2 x JT33	JT2 1/2 x JT33
Chuck capacity	1/2 in.	13 mm
Spindle travel	2 in.	50 mm
Distance from spindle to column	4 in.	101.6 mm
Column diameter	Ø 1-7/8 in.	Ø 48 mm
Table size	6-3/8 x 6-3/8 in.	162 x 162 mm
Base size	11-7/16 x 7-1/8 in.	290 x 186 mm
Overall height	22-7/8 in.	580 mm
Package size (L x W x H)	18-3/32 x 13.4 x 9-13/16 in.	460 x 340 x 250 mm
Net / Gross Wt.	44 / 48.5 lbs.	20 / 22 kgs
20' / 40' Container loading	727 / 1000 units	727 / 1000 units

#### Optional

Vise, work light

## DP10

### 10 in.(250 mm) Bench Drill Press



SPECIFICATIONS	120V	220V
Drilling capacity	1/2 in.	13 mm
Motor	1/4HP	186W
Speed	5 speeds	5 speeds
Spindle taper	JT33	JT33
Chuck capacity	1/2 in.	13 mm
Spindle travel	2-3/8 in.	60 mm
Distance from spindle to column	5 in.	127 mm
Column diameter	Ø 2-5/16 in.	Ø 59.5 mm
Table size	8-3/8 x 8-1/4 in.	213 x 210 mm
Base size	14-3/8 x 8-1/4 in.	366 x 210 mm
Overall height	28-27/64 in.	721.9 mm
Package size (L x W x H)	24-3/16 x 14 x 12 in.	615 x 355 x 305 mm
Net / Gross Wt.	72.3 / 78.7 lbs.	32.8 / 35.7 kgs
20' / 40' Container loading	413 / 551 units	413 / 551 units

#### Optional

Vise, work light

## DP330A

### 13 in.(330 mm) Bench Drill Press



SPECIFICATIONS	120V	220V
Drilling capacity	23/32 in.	18 mm
Motor	2/3 HP	500W
Speed	12 speeds	12 speeds
Spindle taper	MT2	MT2
Chuck capacity	5/8 in.	16 mm
Spindle travel	3-11/32 in.	85 mm
Distance from spindle to column	6.5 in.	168.5 mm
Column diameter	Ø 2-7/8 in.	Ø 73 mm
Table size	10-51/64 x 10-51/64 in.	274 x 274 mm
Base size	18-15/64 x 10-13/16 in.	463 x 274 mm
Overall height	39-23/64 in.	1000 mm
Package size (L x W x H)	31-29/32 x 20-7/8 x 13-25/32 in.	810 x 530 x 350 mm
Net / Gross Wt.	119.2 / 125.7 lbs.	54.1 / 57 kgs
20' / 40' Container loading	226 / 303 units	226 / 303 units

#### Optional

Vise, fence, work light

## DP13A

### 13 in.(330 mm) Bench Drill Press



SPECIFICATIONS	120V	220V
Drilling capacity	5/8 in.	16 mm
Motor	1/3HP	250W
Speed	12 speeds	12 speeds
Spindle taper	MT2 x JT33	MT2 x JT33
Chuck capacity	5/8 in.	16 mm
Spindle travel	3-11/32 in.	85 mm
Distance from spindle to column	6.5 in.	168.5 mm
Column diameter	Ø 2-7/8 in.	Ø 73 mm
Table size	10-51/64 x 10-51/64 in.	274 x 274 mm
Base size	18-15/64 x 10-51/64 in.	463 x 274 mm
Overall height	39-23/64 in.	1000 mm
Package size (L x W x H)	32 x 21-3/32 x 11-3/4 in.	812 x 535 x 298 mm
Net / Gross Wt.	110.5 / 115.3 lbs.	50.1 / 52.3 kgs
20' / 40' Container loading	196 / 392 units	196 / 392 units

#### Optional

Vise, fence, work light

## DP380A

### 15 in.(380 mm) Bench Drill Press



SPECIFICATIONS	120V	220V
Drilling capacity	25/32 in.	20 mm
Motor	5/6HP	650W
Speed	12 speeds	12 speeds
Spindle taper	MT2	MT2
Chuck capacity	5/8 in.	16 mm
Spindle travel	3-11/32 in.	85 mm
Distance from spindle to column	7-1/2 in.	190.5 mm
Column diameter	Ø 2-7/8 in.	Ø 73 mm
Table size	13-15/64 x 13-15/64 in.	336 x 336 mm
Base size	20-3/8 x 11 in.	518 x 279.4 mm
Overall height	39-3/16 in.	995.5 mm
Package size (L x W x H)	31-7/8 x 22-1/4 x 12 in.	810 x 565 x 305 mm
Net / Gross Wt.	139.6 / 146.6 lbs.	63.3 / 66.5 kgs
20' / 40' Container loading	128 / 250 units	128 / 250 units

#### Optional

Vise, fence, work light

## DP430F

### 17 in.(430 mm) Floor Drill Press



SPECIFICATIONS	120V	220V
Drilling capacity	1 in.	25 mm
Motor	1.2HP	850W
Speed	12 speeds	12 speeds
Spindle taper	MT3	MT3
Chuck capacity	5/8 in.	16 mm
Spindle travel	3-1/4 in.	82.5 mm
Distance from spindle to column	8-1/2 in.	215 mm
Column diameter	Ø 3-1/8 in.	Ø 80 mm
Table size	14-1/4 x 14-1/4 in.	364 x 364 mm
Base size	20-3/8 x 11 in.	518 x 279.4 mm
Overall height	64-13/16 in.	1647 mm
Package size (L x W x H)	56-9/32 x 21-7/16 x 11-3/16 in.	1430 x 545 x 285 mm
Net / Gross Wt.	157.6 / 167.6 lbs.	71.5 / 76 kgs
20' / 40' Container loading	128 / 260 units	128 / 260 units

#### Optional

Vise, fence, work light

## 270F

### 20 in.(500 mm) Floor Drill Press




SPECIFICATIONS	120V	220V
Drilling capacity	1 in.	25 mm
Motor (Input)	1HP	746 W
Speed	9 speeds	9 speeds
Spindle taper	MT3	MT3
Chuck capacity	3/4 in.	19 mm
Spindle travel	4-11/16 in.	120 mm
Distance from spindle to column	10-1/4 in.	260.5 mm
Column diameter	Ø 3-1/3 in.	Ø 85 mm
Table size	18-1/2 x 15-15/16 in.	470 x 405 mm
Base size	22-13/16 x 13-25/32 in.	580 x 350 mm
Overall height	66-1/8 in.	1680 mm
Package size (L x W x H)	56-23/32 x 25-3/8 x 12-19/32 in.	1440 x 645 x 320 mm
Net / Gross Wt.	269.6 / 284.6 lbs.	122.3 / 129.1 kgs
20' / 40' Container loading	85 / 150 units	85 / 150 units

#### Optional

Vise, fence, work light

# Tile Saw


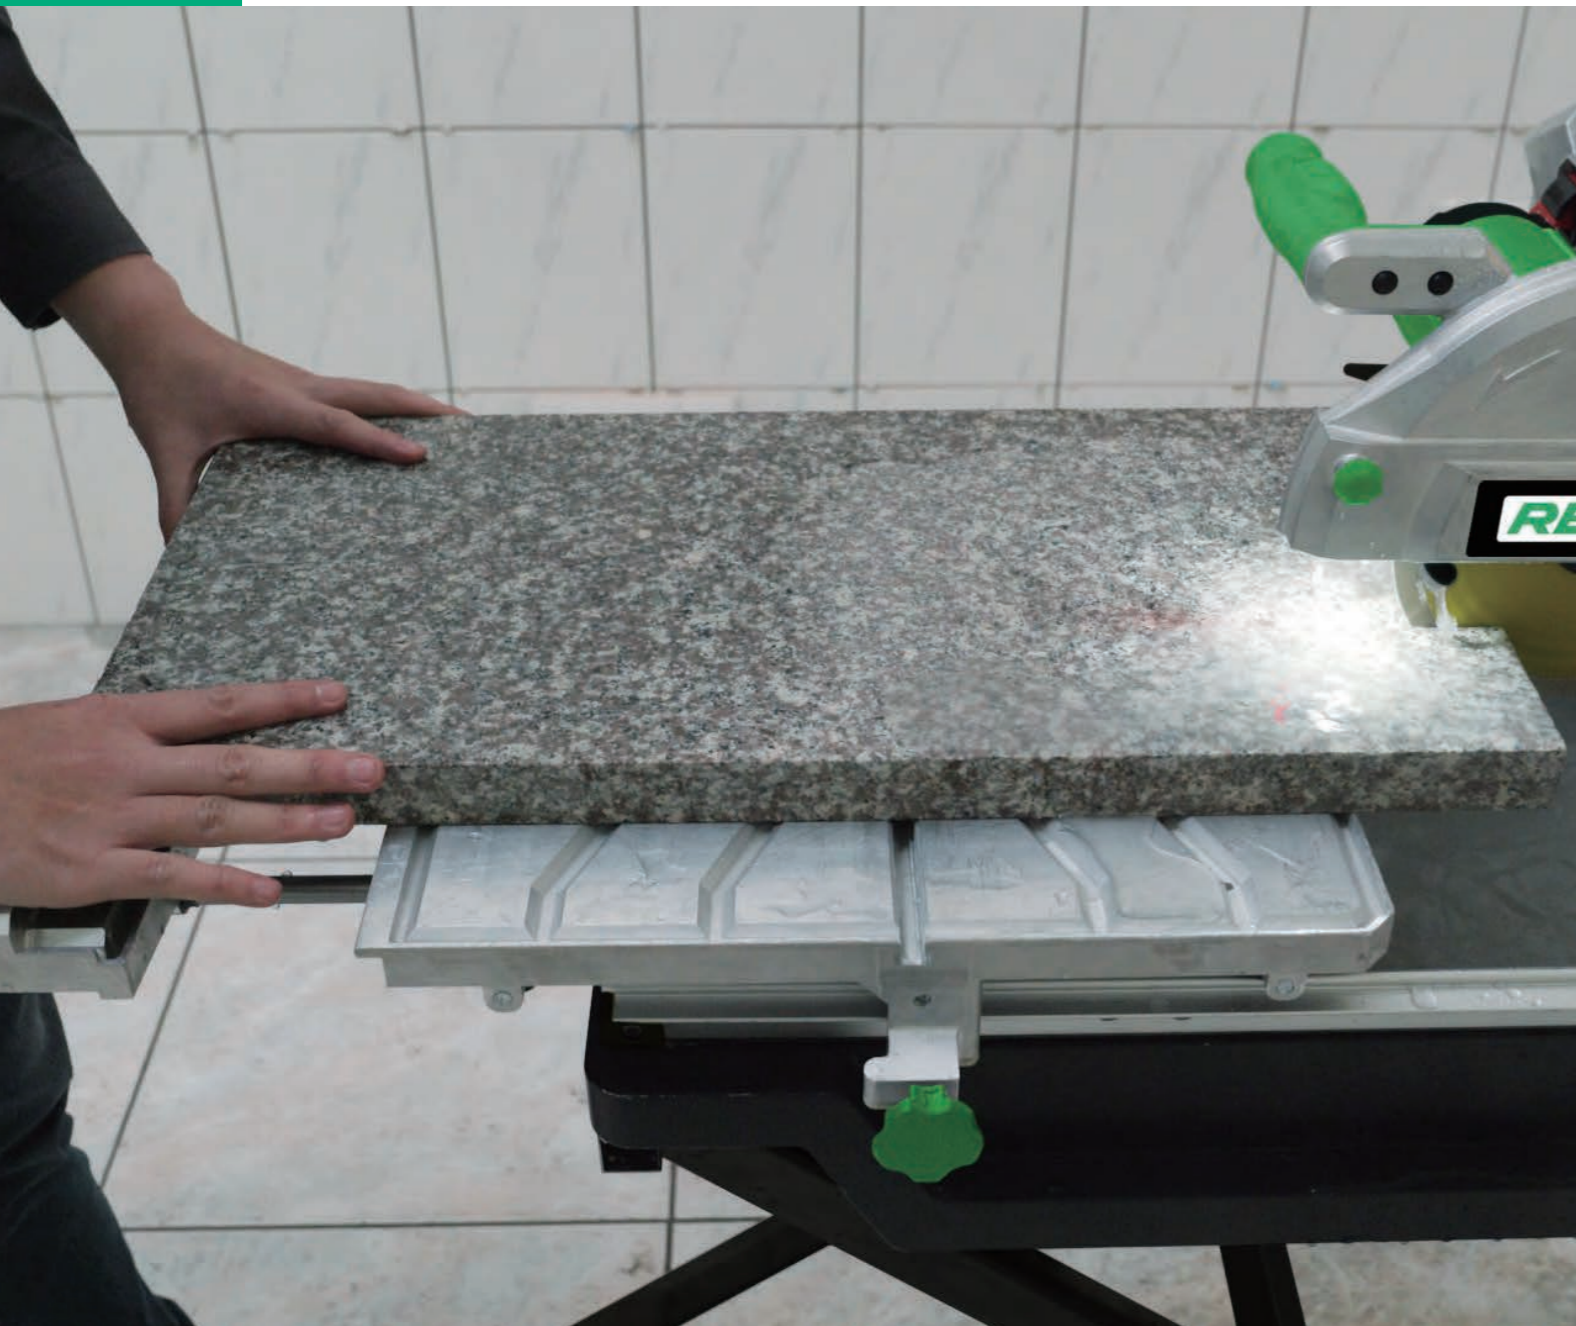


Coming Soon

## SC1802R

7 in.(180 mm)  
Folding Slide Tile Saw

LED Made in Taiwan

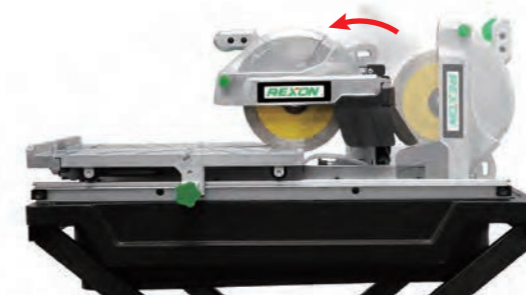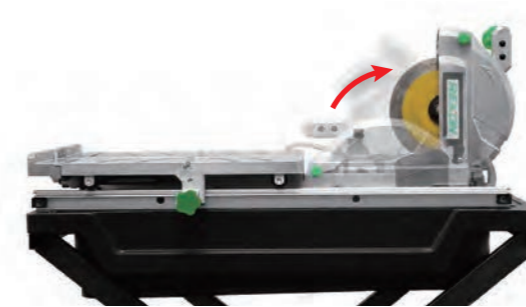

SPECIFICATIONS	120V	220V
Motor	9A	1030W
Speed	5700rpm	5700min <sup>-1</sup>
Table size (W x L)	16-1/2 x 15-1/2 in.	420 x 400 mm
Positive bevel tilt stops	0°, 22.5°, 45°(R)	0°, 22.5°, 45°(R)
Max. depth of cut at 90°	2-1/4 in.	57.2 mm
Max. depth of cut at 45°	1 in.	25.4 mm
Ripping capacity	30 in.	762 mm
Diagonal cut capacity	18 in.	457.2 mm
Package size (L x W x H)	33-9/32 x 22-13/16 x 12-5/16 in.	845 x 580 x 313 mm
Net / Gross Wt.	56 / 69 lbs.	25.4 / 31.3 kgs
20' Container loading	196 units	196 units
40' Container loading	392 units	392 units

### Optional

Blade, stand

Clamp for small tile



T-shape extension provided optimized support



Fin-type table insert to reduce water spray



Water controls for volume / direction



Design for easy carry



# Tile Saw

## SC2500R



10 in.(254 mm) Mobile Slide Tile Saw

☐ ⚡ Made in Taiwan

SPECIFICATIONS	120V	220V
Motor	15A	1650W
Speed	4500rpm	4500min <sup>-1</sup>
Table size (W x L)	17-5/16 x 14-3/4 in.	440 x 375 mm
Positive bevel tilt stops	0°, 22.5°, 45°(R)	0°, 22.5°, 45°(R)
Max. depth of cut at 90°	3-3/4 in.	95.3 mm
Max. depth of cut at 45°	2-3/8 in.	61 mm
Ripping capacity	24 in.	609.6 mm
Diagonal cut capacity	17 in.	431.8 mm
Package size (L x W x H)	39-3/8 x 28-3/4 x 21-1/4 in.	1000 x 730 x 540 mm
Net / Gross Wt.	91.5 / 105.8 lbs.	41.5 / 48 kgs
20' Container loading	68 units	68 units
40' Container loading	140 units	140 units

Optional  
Blade

## SC2502R



10 in.(254 mm) Folding Slide Tile Saw

⚠ LED ☐ Made in Taiwan

SPECIFICATIONS	120V	220V
Motor	15A	1650W
Speed	4000rpm	4000min <sup>-1</sup>
Table size (W x L)	28-1/4 x 15-3/4 in.	717 x 400 mm
Positive bevel tilt stops	0°, 22.5°, 45°(R)	0°, 22.5°, 45°(R)
Max. depth of cut at 90°	3-3/4 in.	95.3 mm
Max. depth of cut at 45°	2-1/2 in.	63.5 mm
Ripping capacity	40 in.	1016 mm
Diagonal cut capacity	24 in.	609.6 mm
Package size (L x W x H)	44-9/32 x 26-31/32 x 19-21/32 in.	1125 x 685 x 500 mm
Net / Gross Wt.	105 / 117 lbs.	47.6 / 53.1 kgs
20' Container loading	64 units	64 units
40' Container loading	136 units	136 units

Optional  
Blade

## TC1802R



7 in.(180 mm) Tile Saw

☐ Made in Taiwan

SPECIFICATIONS	120V	220V
Motor	6A	685W
Speed	5200rpm	5200min <sup>-1</sup>
Table size (W x L)	23 x 18 in.	585 x 457 mm
Positive bevel tilt stops	0°, 22.5°, 45°(R)	0°, 22.5°, 45°(R)
Max. depth of cut at 90°	1-1/4 in.	31.8 mm
Max. depth of cut at 45°	1 in.	25.4 mm
Ripping capacity	24-1/8 in.	613 mm
Diagonal cut capacity	17 in.	431.8 mm
Package size (L x W x H)	28-1/2 x 23 x 12-3/8 in.	724 x 584 x 315 mm
Net / Gross Wt.	32.8 / 36.3 lbs.	14.9 / 16.5 kgs
20' Container loading	210 units	210 units
40' Container loading	420 units	420 units

Optional  
Blade, Stand



Quick release clamp  
Easy to fix small workpiece  
for particular angle cutting



# Scroll saw



Coming Soon

## VS4501R

18 in.(457 mm)  
Variable Speed Scroll Saw



SPECIFICATIONS	120V	220V
Motor	1.6A	120W
Speed	500-1500spm	500-1500spm
Vibration	126dB	126dB
Max. thickness of cut at 90°	2-1/4 in.	57.2 mm
Max. thickness of cut at 45°	1-1/8 in.(L)	28.6 mm(L)
Throat	18 in.	457 mm
Blade length	5 in. pin end 5 in. plain end	127 mm pin end 127 mm plain end
Stroke	3/4 in.	19 mm
Table size	12-21/32 x 19-29/32 in.	322 x 505.9 mm
Table tilt	0° to 45°(L) & 0° to 15°(R)	0° to 45°(L) & 0° to 15°(R)
Package size (L x W x H)	32-21/32 x 17-1/8 x 17-5/16 in.	830 x 435 x 440 mm
Net / Gross Wt.	34.6 / 41.4 lbs.	15.7 / 18.8 kgs
20' Container loading	175 units	175 units
40' Container loading	350 units	350 units
<b>Optional</b>		
LED work light, stand		



Upfront controls; conveniently located on/off switch; speed control varies between 500-1500spm (strokes per minute) (no load speeds)



Large die cast aluminum pear shape table micro adjusts 45° left and 15° right

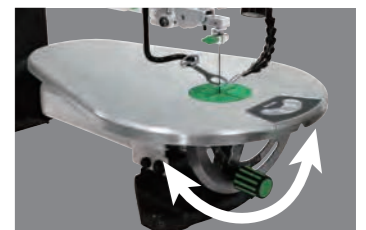


Table top bevel indicator



Gooseneck style air blower



# Scroll saw

## VS4500R

### 18 in.(457 mm) Variable Speed Scroll Saw



SPECIFICATIONS	120V	220V
Motor	1.6A	120W
Speed	500-1500spm	500-1500spm
Vibration	150dB	150dB
Max. thickness of cut at 90°	2-1/4 in.	57.2 mm
Max. thickness of cut at 45°	1-1/8 in.(L)	28.6 mm(L)
Throat	18 in.	457 mm
Blade length	5 in. pin end 5 in. plain end	127 mm pin end 127 mm plain end
Stroke	3/4 in.	19 mm
Table size	12-21/32 x 19-29/32 in.	322 x 505.9 mm
Table tilt	0° to 45°(L) & 0° to 15°(R)	0° to 45°(L) & 0° to 15°(R)
Package size (L x W x H)	32-21/32 x 17-1/8 x 17-5/16 in.	830 x 435 x 440 mm
Net / Gross Wt.	34.6 / 41.4 lbs.	15.7 / 18.8 kgs
20' Container loading	175 units	175 units
40' Container loading	350 units	350 units

#### Optional

LED work light, stand

## VS4005A

### 16 in.(406 mm) Variable Speed Scroll Saw



SPECIFICATIONS	120V	220V
Motor	1.2A	125W
Speed	550-1600spm	550-1600spm
Max. thickness of cut at 90°	2 in.	50.8 mm
Max. thickness of cut at 45°	3/4 in.(L)	19 mm(L)
Throat	16 in.	406 mm
Blade length	5 in. pin end 5 in. plain end	127 mm pin end 127 mm plain end
Stroke	3/4 in.	19 mm
Table size	16-5/16 x 10 in.	414 x 254 mm
Table tilt	0° to 45°(L)	0° to 45°(L)
Package size (L x W x H)	26-3/8 x 12-25/32 x 15-3/4 in.	670 x 325 x 400 mm
Net / Gross Wt.	27.6 / 32 lbs.	12.5 / 14.5 kgs
20' Container loading	335 units	335 units
40' Container loading	670 units	670 units

#### Optional

None





# Sander




## BD46A

4 in.(100 mm) Belt x 6 in.(150 mm) Disc Sander

SPECIFICATIONS	120V	220V
Motor	4.2A	450W
Belt size	4 x 36 in.	100 x 914 mm
Belt speed	1760fpm	448m/min
Belt table tilt	0°~90°	0°~90°
Belt work table tilt	N/A	N/A
Belt work table size	N/A	N/A
Disc size	Ø 6 in.	Ø 152 mm
Disc speed	2800rpm	2337min <sup>-1</sup>
Disc work table tilt	0°~45°	0°~45°
Disc work table size	6-1/4 x 8-7/8 in.	159 x 225 mm
Package size (L x W x H)	24-3/8 x 13 x 14-3/4 in.	620 x 330 x 375 mm
Net / Gross Wt.	52 / 57.5 lbs.	23.6 / 26.1 kgs
20' / 40' Container loading	368 / 758 units	368 / 758 units

**Optional**

None

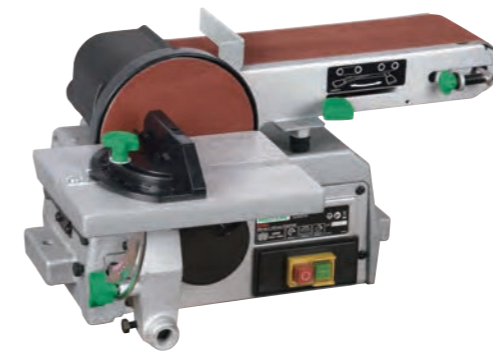

Robust and heavy one piece cast iron housing with easy carrying handles


Worktable can be used for disc or belt sanding and can be tilted to 45° for bevel sanding



Quick belt tension release lever for quick belt change



Individual dust extraction ports for sanding belt and sanding disc

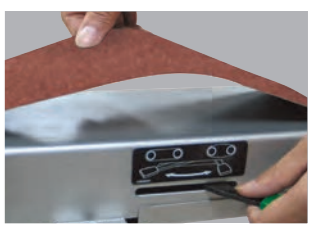

## BD460R

4 in.(100 mm) Belt x 6 in.(150 mm) Disc Sander

SPECIFICATIONS	120V	220V
Motor	4.3A	370W
Belt size	4 x 36 in.	100 x 914 mm
Belt speed	1700fpm	535m/min
Belt table tilt	0°~90°	0°~90°
Belt work table tilt	N/A	N/A
Belt work table size	N/A	N/A
Disc size	Ø 6 in.	Ø 152 mm
Disc speed	3450rpm	2850min <sup>-1</sup>
Disc work table tilt	0°~45°	0°~45°
Disc work table size	6-1/4 x 8-7/8 in.	159 x 225 mm
Package size (L x W x H)	22-1/32 x 10-5/8 x 12-3/8 in.	560 x 270 x 315 mm
Net / Gross Wt.	41.9 / 46.3 lbs.	19 / 21 kgs
20' / 40' Container loading	550 / 995 units	550 / 995 units

**Optional**

None



## BD480R

4 in.(100 mm) Belt x 8 in.(203 mm) Disc Sander

SPECIFICATIONS	120V	220V
Motor	5.0A	550W
Belt size	4 x 36 in.	100 x 914 mm
Belt speed	2161fpm	551m/min
Belt table tilt	0°~90°	0°~90°
Belt work table tilt	0°~45°	0°~45°
Belt work table size	4-15/16 x 6-11/16 in.	125 x 170 mm
Disc size	Ø 8 in.	Ø 203 mm
Disc speed	3450rpm	2850min <sup>-1</sup>
Disc work table tilt	0°~45°	0°~45°
Disc work table size	5-29/32 x 10-25/64 in.	150 x 264 mm
Package size (L x W x H)	23-1/4 x 20-7/16 x 15-5/32 in.	590 x 519 x 385 mm
Net / Gross Wt.	50 / 58.2 lbs.	22.7 / 26.4 kgs
20' / 40' Container loading	252 / 516 units	252 / 516 units

**Optional**

None



# Bench Grinder



Ergonomic handlebar to easily carry

Medium and coarse grit grinding wheels



## Bench Grinder



### BG1502R

6 in.(150 mm)  
Bench Grinder

SPECIFICATIONS	120V	220V
Motor	1.27A	140W
Speed	3,450rpm	3,450min <sup>-1</sup>
Dry stone (D x d x T)	Ø 6 x Ø 1/2 x 3/4 in.	Ø 150 x Ø 12.7 x 19 mm
Light	N/A	N/A
Package size (L x W x H)	12-1/8 x 8-3/32 x 8-21/32 in.	308 x 205 x 220 mm
Net / Gross Wt.	13.2 / 13.6 lbs.	6 / 6.2 kgs
20' Container loading	1800 units	1800 units
40' Container loading	N/A	N/A

Optional  
None



### BG1500R

6 in.(150 mm) Bench Grinder

SPECIFICATIONS	120V	220V
Motor	2.5A	370W
Speed	3450rpm	2850min <sup>-1</sup>
Dry stone (D x d x T)	Ø 6 x Ø 1/2 x 3/4 in.	Ø 150 x Ø 12.7 x 19 mm
Light	40W	40W
Package size (L x W x H)	20-3/32 x 11-5/8 x 9-5/8 in.	510 x 295 x 245 mm
Net / Gross Wt.	24.5 / 25.1 lbs.	11.1 / 11.4 kgs
20' Container loading	765 units	765 units
40' Container loading	1503 units	1503 units

Optional  
Work light



### BG2000R

8 in.(200 mm) Bench Grinder

SPECIFICATIONS	120V	220V
Motor	5.0A	550W
Speed	3450rpm	2850min <sup>-1</sup>
Dry stone (D x d x T)	Ø 8 x Ø 5/8 x 1 in.	Ø 200 x Ø 15.8 x 25.4 mm
Light	40W	40W
Package size (L x W x H)	21-3/16 x 12-29/32 x 11-1/32 in.	538 x 328 x 280 mm
Net / Gross Wt.	39.5 / 42.6 lbs.	17.9 / 19.3 kgs
20' Container loading	560 units	560 units
40' Container loading	987 units	987 units

Optional  
Work light



# Bench Grinder

## VG1500R

### 6 in.(150 mm) Variable Speed Bench Grinder




SPECIFICATIONS	120V	220V
Motor	2.5A	250W
Speed	2000-3400rpm	2000-2850min <sup>-1</sup>
Dry stone (D x d x T)	Ø 6 x Ø 1/2 x 3/4 in.	Ø 150 x Ø 12.7 x 19 mm
Light	40W	40W
Package size (L x W x H)	20-3/32 x 11-5/8 x 9-5/8 in.	510 x 295 x 245 mm
Net / Gross Wt.	26.5 / 28.7 lbs.	12 / 13 kgs
20' Container loading	765 units	765 units
40' Container loading	1503 units	1503 units
<b>Optional</b>		
Work light		

## VG2000R

### 8 in.(200 mm) Variable Speed Bench Grinder




SPECIFICATIONS	120V	220V
Power input	5.0A	370W
Speed	2000-3400rpm	2000-2850min <sup>-1</sup>
Dry stone (D x d x T)	Ø 8 x Ø 5/8 x 1 in.	Ø 200 x Ø 15.8 x 25.4 mm
Light	40W	40W
Package size (L x W x H)	21-3/16 x 12-29/32 x 11-1/32 in.	538 x 328 x 280 mm
Net / Gross Wt.	39.7 / 41.9 lbs.	18 / 19 kgs
20' Container loading	560 units	560 units
40' Container loading	987 units	987 units
<b>Optional</b>		
Work light		

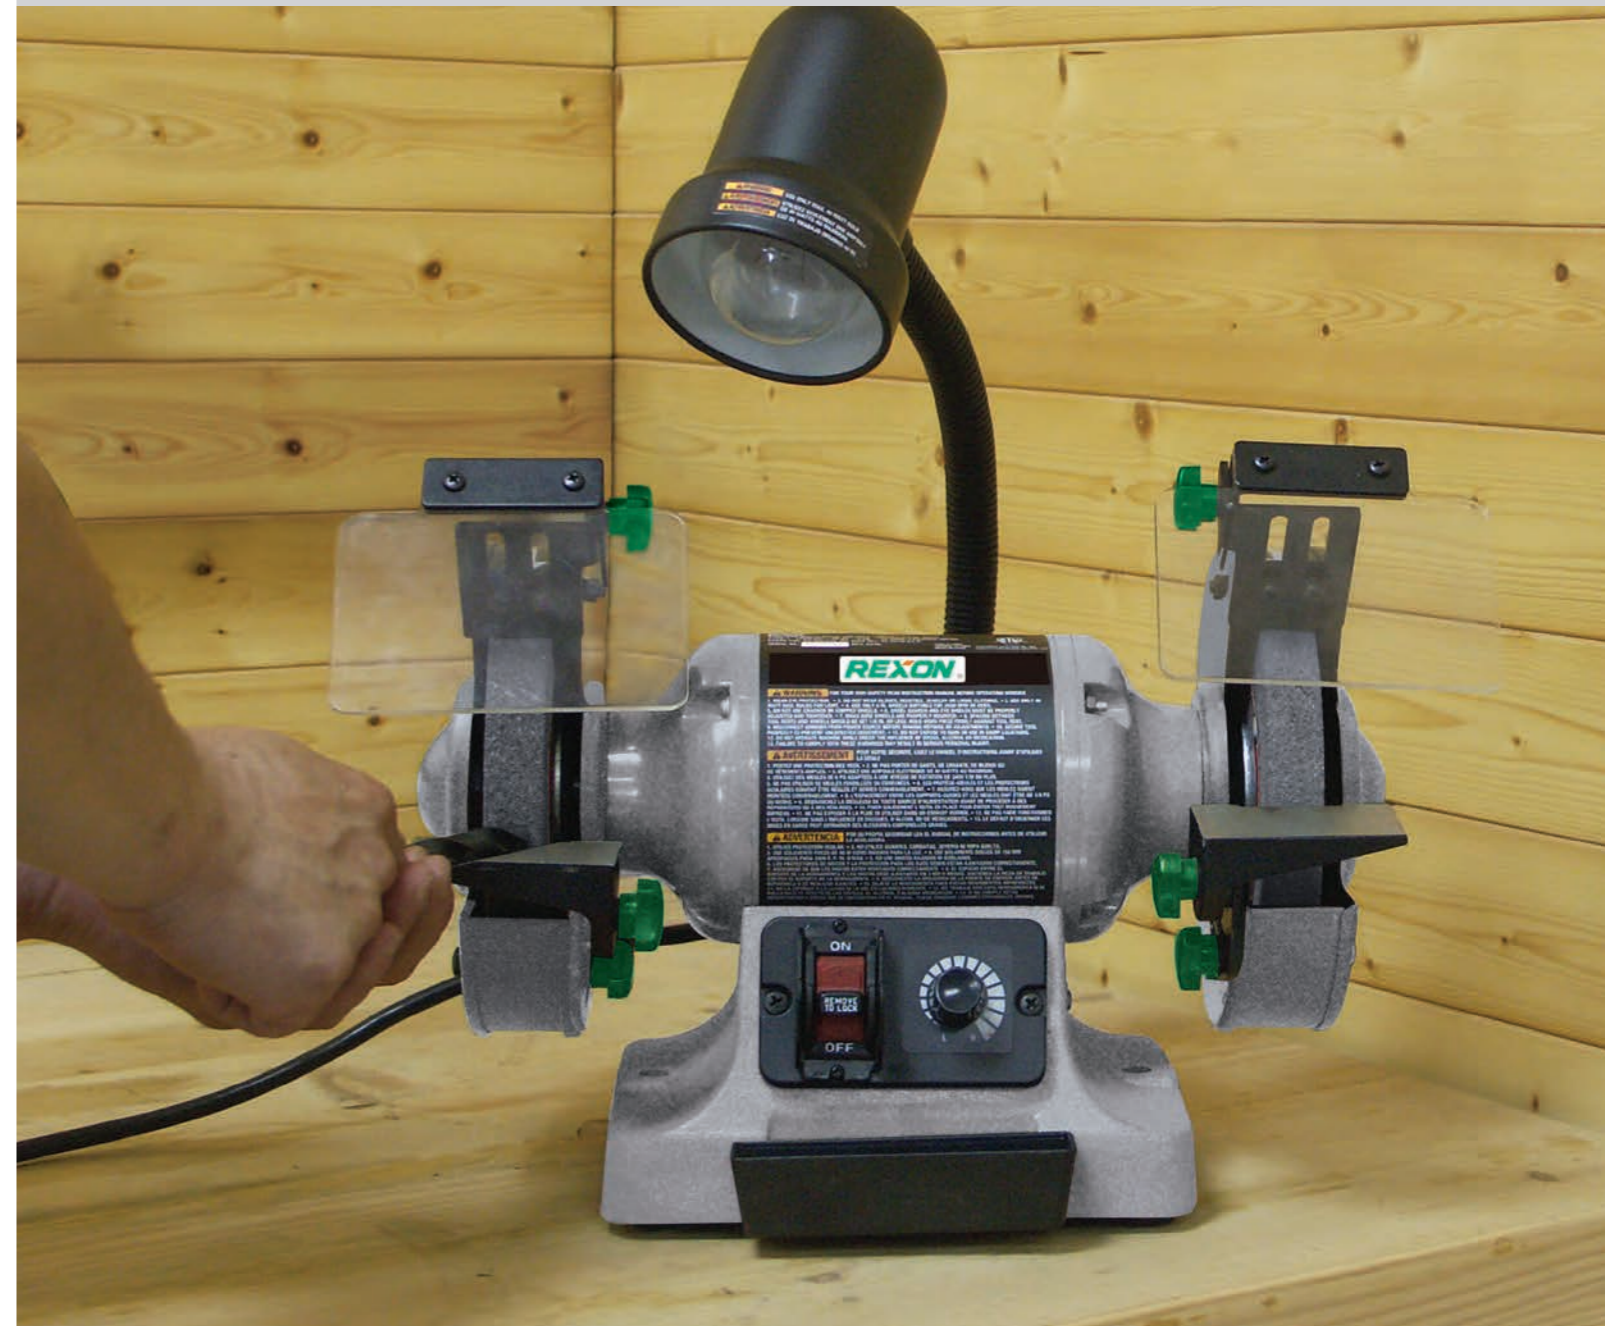

Aluminum tool rest with groove for easy drill bit sharpening



Built-in flexible work lamp for better illumination of the work area

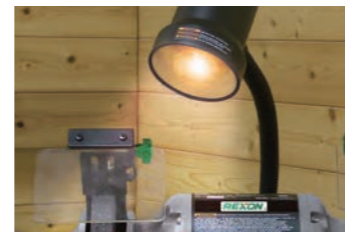

Variable speed control: 2000-3400rpm(60Hz) for grinding or sharpening



Medium and coarse grit grinding wheels



# Planer



## AP3300R

13 in.(330 mm)  
Bench Planer

Made in Taiwan



SPECIFICATIONS	120V	220V
Motor	15A	1800W
Blade speed	9250rpm	9250min <sup>-1</sup>
Feed speed	24fpm	7.3m/min
Knife length	13 in.	330.2 mm
Min. stock length	5 in.	127 mm
No. of knife	2	2
Max. depth of cut	3/32 in.	2.4 mm
Thickness of stock	1/8-5-29/32 in.	3.2-150 mm
Max. width of stock	13 in.	330.2 mm
Package size (L x W x H)	24-19/32 x 17-29/32 x 20-7/8 in.	625 x 455 x 530 mm
Net / Gross Wt.	81.6 / 93.7 lbs.	37 / 42.5 kgs
20' Container loading	180 units	180 units
40' Container loading	372 units	372 units
<b>Optional</b>		
Stand		



Crank handle can be mounted on either side of unit for left or right handed users



Foldable long extension tables with rollers provide good support to the long workpiece and easy feeding



Quick cutting head lock



Built-in tool storage



# Cut Off Saw



## CS3556R

14 in.(355 mm) Cut Off Saw



SPECIFICATIONS	120V	220V
Motor	15A	2300W
Speed	3600rpm	3600min <sup>-1</sup>
Cutting wheel size	Ø 14 in. O.D., Ø 1 in. bore	Ø 355 mm O.D., Ø 25.4 mm bore
Cross cut at 90°	Ø : 5 in.	Ø : 127 mm
	□ : 4-3/4 x 4-3/4 in.	□ : 120 x 120 mm
	□ : 3 x 8-1/4 in.	□ : 75 x 211 mm
	4-1/4 x 6-1/8 in.	107 x 155 mm
	4-1/2 x 5-1/8 in.	115 x 130 mm
Miter cut at 45°	Ø : 4 in.	Ø : 102 mm
	□ : 4 x 4 in.	□ : 102 x 102 mm
	□ : 3-1/3 x 5 in.	□ : 85 x 127 mm
Package size (L x W x H)	24-3/16 x 13-3/16 x 16-9/16 in.	615 x 335 x 420 mm
Net / Gross Wt.	49.8 / 53.6 lbs.	22.6 / 24.3 kgs
20' / 40' Container loading	310 / 645 units	310 / 645 units

**Optional**


Cutting wheel, lower guard



Powerful motor allows for fast and smooth cutting of different sized and shaped workpieces



Chip deflector decreases debris and allows for safe operation

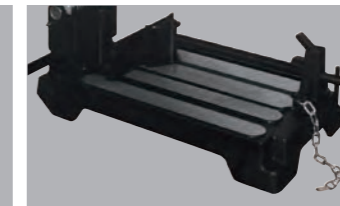

Large and firm base allows for precise and accurate cuts



On board wrench storage provides convenient storage when not in use

## CS3555R

14 in.(355 mm) Cut Off Saw



SPECIFICATIONS	120V	220V
Motor	15A	2300W
Speed	3600rpm	3600min <sup>-1</sup>
Cutting wheel size	Ø 14 in. O.D., Ø 1 in. bore	Ø 355 mm O.D., Ø 25.4 mm bore
Cross cut at 90°	Ø : 5 in.	Ø : 127 mm
	□ : 4-3/4 x 4-3/4 in.	□ : 120 x 120 mm
	□ : 3 x 8-1/4 in.	□ : 75 x 211 mm
	4-1/4 x 6-1/8 in.	107 x 155 mm
	4-1/2 x 5-1/8 in.	115 x 130 mm
Miter cut at 45°	Ø : 4 in.	Ø : 102 mm
	□ : 4 x 4 in.	□ : 102 x 102 mm
	□ : 3-1/3 x 5 in.	□ : 85 x 127 mm
Package size (L x W x H)	24-3/16 x 13-3/16 x 16-15/16 in.	615 x 335 x 430 mm
Net / Gross Wt.	37.9 / 42.1 lbs.	17.2 / 19.1 kgs
20' / 40' Container loading	310 / 645 units	310 / 645 units

**Optional**

Cutting wheel, lower guard

## CS3555R2

14 in.(355 mm) Cut Off Saw



LED light with overload protection

Coming Soon



SPECIFICATIONS	120V	220V
Motor	15A	2300W
Speed	3600rpm	3600min <sup>-1</sup>
Cutting wheel size	Ø 14 in. O.D., Ø 1 in. bore	Ø 355 mm O.D., Ø 25.4 mm bore
Cross cut at 90°	Ø : 5 in.	Ø : 127 mm
	□ : 4-3/4 x 4-3/4 in.	□ : 120 x 120 mm
	□ : 3 x 8-1/4 in.	□ : 75 x 211 mm
	4-1/4 x 6-1/8 in.	107 x 155 mm
	4-1/2 x 5-1/8 in.	115 x 130 mm
Miter cut at 45°	Ø : 4 in.	Ø : 102 mm
	□ : 4 x 4 in.	□ : 102 x 102 mm
	□ : 3-1/3 x 5 in.	□ : 85 x 127 mm
Package size (L x W x H)	24-3/16 x 13-3/16 x 16-15/16 in.	615 x 335 x 430 mm
Net / Gross Wt.	36.6 / 40.1 lbs.	16.6 / 18.2 kgs
20' / 40' Container loading	310 / 645 units	310 / 645 units

**Optional**

Cutting wheel, lower guard

# Band Saw



## PB1200R

4-3/4 in.(120 mm) Portable Band Saw

Made in Taiwan

SPECIFICATIONS	120V	220V
Motor	10A	1050W
Speed	24500rpm	24500min <sup>-1</sup>
Blade size	44-7/8 x 1/2 in.	1140 x 13 mm
Cutting speed	196 - 334fpm (5 speeds)	60 - 102m/min (5 speeds)
	1 : 196fpm	1 : 60.0m/min
	2 : 231fpm	2 : 70.5m/min
	3 : 265fpm for steel	3 : 81.0m/min for steel
	4 : 300fpm for soft steel, aluminium & copper	4 : 91.5m/min for soft steel, aluminium & copper
	5 : 334fpm for soft steel, aluminium & copper	5 : 102.0m/min for soft steel, aluminium & copper
Cross cut at 90°	Ø : 4-3/4 in.	Ø : 120.7 mm
	Rectangular : 4-3/4 x 4-3/4 in.	Rectangular : 120 x 120 mm
Miter cut at 45°	Ø : 2 in.	Ø : 50.8 mm
	Rectangular : 1-3/4 x 1-3/4 in.	Rectangular : 45 x 45 mm
Package size (L x W x H)	26-49/64 x 16-47/64 x 10-53/64 in.	680 x 425 x 275 mm
Net / Gross Wt.	16.1 / 18.5 lbs.	7.3 / 8.4 kgs
20' / 40' Container loading	550 / 1100 units	550 / 1100 units

### Optional

None




**COLLISION PREVENTION**  
protective bumpers on both sides of saw to withstand jobsite abuse




**FIVE CUTTING SPEEDS**  
easy speed settings 196 - 334fpm (60-102m/min) for different materials such as aluminum, steel, copper



**ADJUSTABLE BLADE GUIDE**  
provides support of blade for accurate cuts

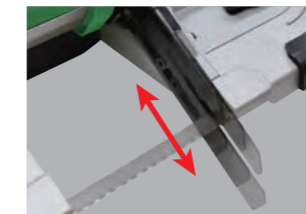

**BUILT-IN LED**  
illuminates the work area for increased accuracy and productivity

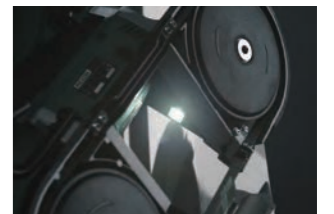

## BS10KA

10 in.(254 mm) Two Speed Band Saw

Made in Taiwan

SPECIFICATIONS	120V	220V
Motor	7.2A	550W
Throat depth	10 in.	254 mm
Max. cutting height	7 in.	177.8 mm
Cutting speed	750 / 2500fpm	230 / 760m/min
Blade length	72-7/16 in.	1840 mm
Table tilt	-4°(L)~50°(R)	-4°(L)~50°(R)
Table size	13-21/32 x 13-21/32 in.	347.1 x 347.1 mm
Package size (L x W x H)	38 x 20-15/32 x 17-1/8 in.	965 x 520 x 435 mm
Net / Gross Wt.	59.5 / 63.9 lbs.	27 / 29 kgs
20' Container loading	127 units	127 units
40' Container loading	254 units	254 units

### Optional

Stand



## BS2300R

9 in.(228 mm) Band Saw

SPECIFICATIONS	120V	220V
Motor	2.5A	270W
Throat depth	8-15/16 in.	228 mm
Max. cutting height	3-5/8 in.	92 mm
Cutting speed	2500fpm	762m/min
Blade length	62 in.	1575 mm
Table tilt	0°~45°(R)	0°~45°(R)
Table size	12 x 12 in.	305 x 305 mm
Package size (L x W x H)	31-3/32 x 17-23/32 x 11-19/32 in.	790 x 450 x 295 mm
Net / Gross Wt.	39.7 / 45.2 lbs.	18 / 20.5 kgs
20' Container loading	245 units	245 units
40' Container loading	525 units	525 units

### Optional

None

